


23/1000 Wall/Roof Load span tables

Profile 23/1000

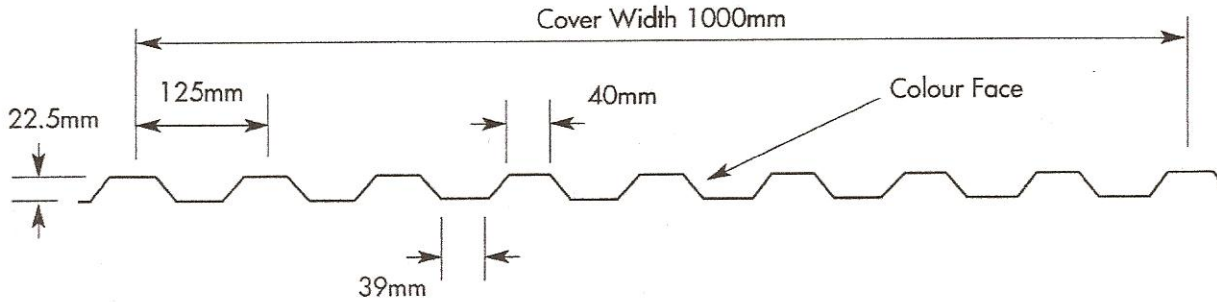

Safe Superimposed Loads (e.g. snow) KN/M SQUARED

gauge (mm)	span (m)	single span		double span		multi-span	
		normal	abnormal	normal	abnormal	normal	abnormal
0.50	1.00	0.87	1.80	1.46	1.46	1.64	1.66
	1.25	0.44	0.99	1.00	1.00	0.84	1.23
	1.50	0.26	0.57	0.62	0.73	0.48	0.93
	1.75	0.16	0.36	0.39	0.56	0.31	0.68
	2.00	0.11	0.24	0.26	0.44	0.20	0.45
0.70	1.00	1.54	3.39	2.87	2.87	2.91	3.28
	1.25	0.79	1.76	1.90	1.97	1.49	2.39
	1.50	0.46	1.02	1.10	1.43	0.86	1.77
	1.75	0.29	0.64	0.69	1.09	0.54	1.21
	2.00	0.19	0.43	0.46	0.85	0.36	0.81
0.90	1.00	2.17	4.83	4.36	4.36	4.09	4.99
	1.25	1.11	2.47	2.68	2.96	2.10	3.59
	1.50	0.64	1.43	1.55	2.14	1.21	2.55
	1.75	0.41	0.90	0.98	1.60	0.76	1.70
	2.00	0.27	0.60	0.65	1.23	0.51	1.14

Safe Uplift Loads (e.g. winds) KN/M SQUARED

gauge (mm)	span (m)	single span		double span		multi-span	
		trough	crown	trough	crown	trough	crown
0.50	1.00	2.06	2.06	2.05	1.73	2.39	1.98
	1.25	1.19	1.19	1.31	1.19	1.53	1.45
	1.50	0.71	0.71	0.91	0.86	1.06	1.07
	1.75	0.46	0.46	0.67	0.66	0.78	0.78
	2.00	0.32	0.32	0.51	0.51	0.58	0.58
0.70	1.00	3.62	3.62	3.84	3.35	4.47	3.83
	1.25	1.93	1.93	2.46	2.28	2.87	2.77
	1.50	1.16	1.16	1.71	1.66	2.00	2.01
	1.75	0.75	0.75	1.26	1.26	1.37	1.37
	2.00	0.52	0.52	0.97	0.97	0.94	0.94
0.90	1.00	5.11	5.11	5.53	5.03	6.44	5.76
	1.25	2.73	2.73	3.55	3.41	4.14	4.13
	1.50	1.62	1.62	2.47	2.47	2.89	2.90
	1.75	1.02	1.02	1.82	1.83	1.93	1.93
	2.00	0.69	0.69	1.39	1.40	1.29	1.29